


CONTRACTION JOINT

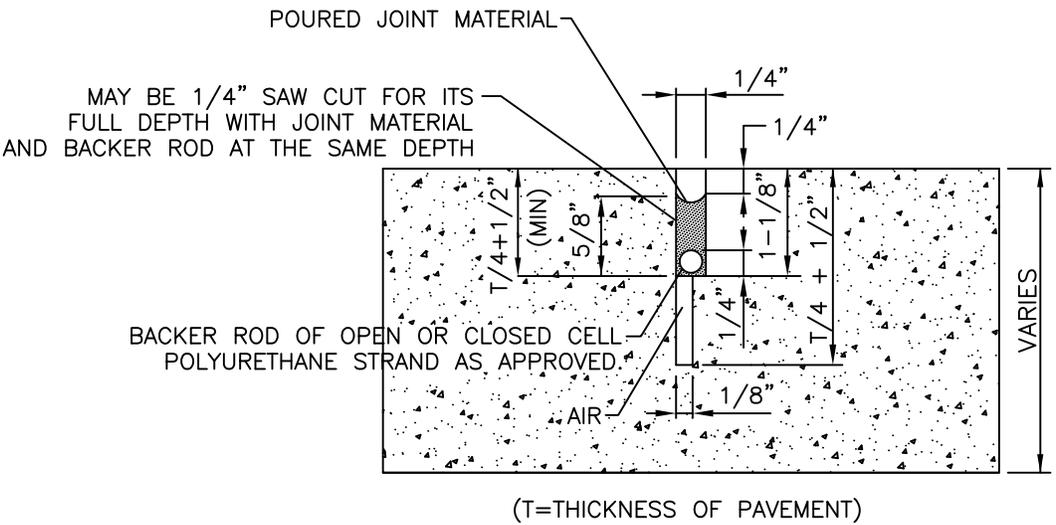

(T=THICKNESS OF PAVEMENT)

PAVEMENT LONGITUDINAL CONTRACTION JOINT

NOTES

- 1. MAXIMUM CONTRACTION JOINT SPACING FOR CURB, GUTTER AND SIDEWALK IS 10'. CONTRACTION JOINTS IN ATTACHED SIDEWALKS SHALL BE STAGGERED SO THEY DO NOT ALIGN WITH THE CONTRACTION JOINTS OF THE CURB & GUTTER (DOES NOT APPLY TO CURBWALKS).
- 2. SAWCUT JOINTS (IF USED) SHALL BE AFTER CONCRETE HAS SUFFICIENTLY HARDENED, BUT BEFORE NO LONGER THAN 48 HOURS AFTER PLACEMENT.

CONTRACTION JOINT DETAILS  
NTS

