


DO NOT CUT OR DAMAGE LEADER, PRUNE DAMAGED OR DEAD BRANCHES AFTER PLANTING AND STAKING. KEEP CROWN SHAPE TYPICAL OF SPECIES.

APPLY SPECIFIED MULCH AT 0" DEPTH AT TRUNK AND 4" DEPTH AT EDGE OF RING, INSIDE WATERING SAUCER. REMOVE SAUCER UPON SODDING/SEEDING IN IRRIGATED AREAS.

4" WATER SAUCER IN NON-IRRIGATED TURF AREAS.

SPECIFIED BACKFILL MIXTURE. AMENDMENTS AS SPECIFIED IN TOP 12" DEPTH. INITIAL STABILIZING BACKFILL 1/3 DEPTH, COMPACTED.

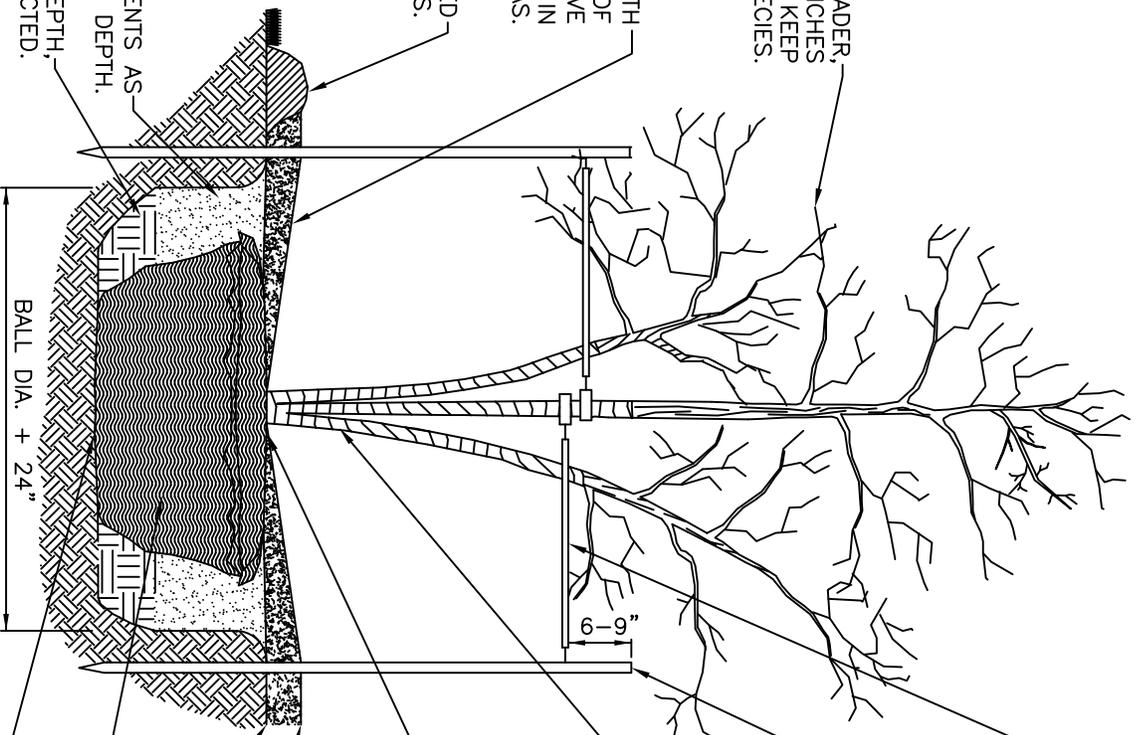

14 GAUGE GALV. WIRE, ATTACH TO SPECIFIED TREE STRAP COLLAR. DO NOT TWIST. THREE WIRE SUPPORTS ON MAIN STRUCTURAL BRANCHES. ALLOW FOR SLIGHT WIND MOVEMENT OF TRUNK(S). STAKES TO BE SECURED TO TREE ABOVE THE FIRST LATERAL BRANCHES BUT NO HIGHER THAN HALF OF THE TREE HEIGHT.

(3) SPECIFIED POSTS, 6'8" IN HEIGHT, ALIGN AS APPROVED. KEEP PLUMB WITH TOPS EVEN. DRIVE 12" INTO DISTURBED SUBGRADE OUTSIDE PLANTING PIT. TREE STAKES LOCATED INSIDE WATERING SAUCER ON TREES GREATER THAN 3" CALIPER. USE GUYS AS PER DETAIL NO. 1500-8.

WRAP ENTIRE SURFACE OF TRUNK FROM THE BASE UP TO BRANCHES WITH REQUIRED WRAPPING, WHEN SPECIFIED. REFER TO SPECIFICATIONS. SECURE AT TOP WITH DUCT TAPE.

ROOT FLARE TO BE AT OR SLIGHTLY ABOVE THE FINISHED GRADE. SET TRUNK PLUMB. SEE NOTES AND SPECIFICATIONS IN SECTION 1500.

MULCH BED LEVEL TO ADJOINING PLANTS. GROUND LEVEL.

REMOVE ALL TWINE AND BURLAP FROM TOP 1/3 OF ROOTBALL. COMPLETELY REMOVE WIRE BASKET. UNDISTURBED PIT BOTTOM FOR ROOTBALL BASE.

- NOTES
1. DO NOT ALLOW WIRE TO TOUCH OR RUB ADJACENT TRUNKS OR BRANCHES.
 2. GUYING AND STAKING TO BE REMOVED AFTER ONE GROWING SEASON.
 3. DO NOT PLANT ANY PLANT WITH A ROOTBALL THAT IS NOT IN COMPLIANCE WITH THE COLORADO NURSERY ACT REQUIREMENTS.

MULTI-TRUNK TREE PLANTING

NTS



TOWN OF FREDERICK
STANDARDS & SPECIFICATIONS