


- NOTES:
- 1: ALL WIRES SHALL BE STRANDED COPPER TYPE RHW-2/RHH/USE-2.
 - 2: A MINIMUM OF 24 INCHES OF SLACK SHALL BE INSTALLED IN EACH WIRE IN THE TEST STATION BOX.
 - 3: ALL WIRES SHALL BE ATTACHED TO TOP OF PIPE.
 - 4: ANODES ARE TO BE PLACED AT PIPE DEPTH OR BELOW AND 5 FEET AWAY FROM THE PIPE. INSTALL ON ALTERNATE SIDES OF THE PIPE.

TEST STATION
TERMINAL BOARD
WIRING DETAIL.

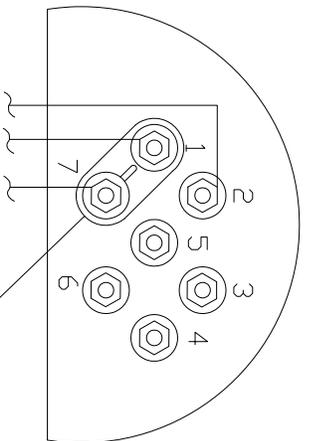

0.01 OHM--8 AMPERE
SHUNT COLOR CODE--
YELLOW COTT MANUF.

TERMINAL AND WIRE #	SIZE	COLOR
1	12 AWG	RED
2	12 AWG	RED
7 (A&B)	12 AWG	BLACK

CATHODIC TEST STATION - TYPE 1

NTS



TOWN OF FREDERICK
STANDARDS & SPECIFICATIONS