


- NOTES:
- 1: A MINIMUM OF 24 INCHES OF SLACK WIRE SHALL BE INSTALLED FOR EACH WIRE IN THE TEST STATION BOX.
  - 2: ALL WIRES SHALL BE STRANDED COPPER TYPE RHW-2/RHH/USE-2.
  - 3: ALL WIRES SHALL BE ATTACHED TO THE PIPE TOP CENTERLINE.
  - 4: ANODES ARE TO BE PLACED AT PIPE DEPTH OR BELOW AND 5 FEET AWAY FROM THE PIPE.

TEST STATION  
TERMINAL BOARD  
WIRING DETAIL.

0.01 OHM-8 AMPERE SHUNT COLOR  
CODE- YELLOW COTT MANUF.

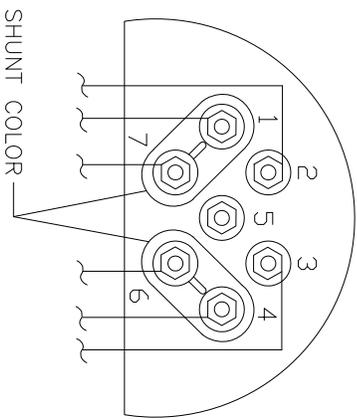

TERMINAL AND WIRE #	AWG SIZE	COLOR
1	12 AWG	RED
2	12 AWG	RED
3	12 AWG	BLUE
4	12 AWG	BLUE
5	—	—
6 (A&B)	12 AWG	BLACK/BLUE
7 (A&B)	12 AWG	BLACK/RED

# CATHODIC TEST STATION - TYPE 3

NTS

