
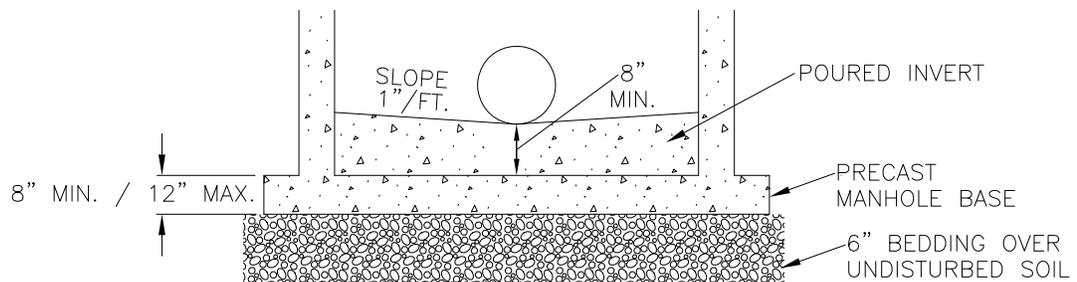


FLAT TOP MANHOLES SHALL ONLY BE USED DUE TO HEIGHT CONSTRAINTS WITH WRITTEN APPROVAL OF TOWN ENGINEER. ALL FLAT TOPS ARE TO BE PRE-CAST AND H20 TRAFFIC RATED REGARDLESS OF LOCATION. SEPARATED DESIGN DETAIL REQUIRED.

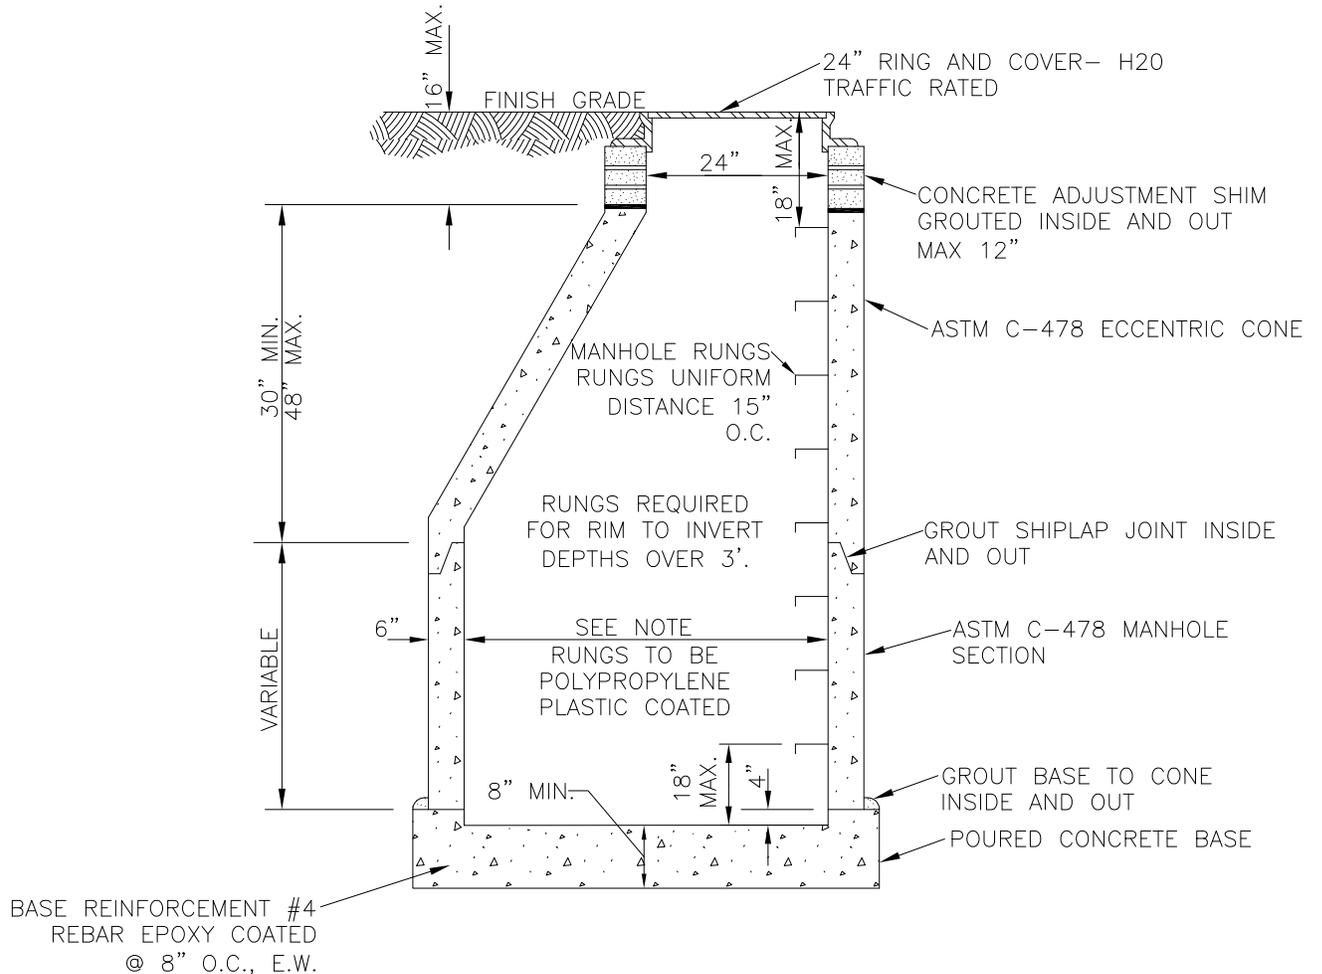

ALTERNATE BASE

NOTE: MINIMUM INSIDE DIAMETER OF MANHOLE SHALL BE AS FOLLOWS.

PIPE SIZE	MIN. MH DIAMETER
15" TO 36"	48"
42" TO 48"	60"
54" TO 60"	72"

MANHOLE SPACING

MAX. 400' APART FOR 15" TO 36" LINES  
 MAX. 500' APART FOR 36" > LINES. \*

\*ELLIPTICAL PIPE IS BASED ON SMALLER DIMENSION

STANDARD MANHOLE

NTS

