


PROFILE



TOP VIEW

PICK HOLE

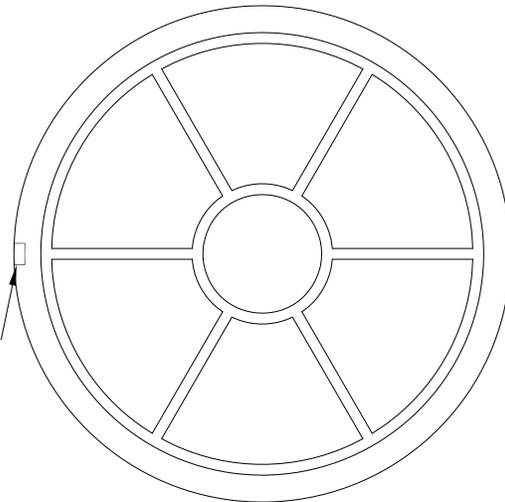

BOTTOM VIEW

NOTES:

1. RIM & LID TO BE H2O TRAFFIC RATED
2. 4"-8" SET RINGS ALLOWED
3. FOR PAVEMENT PERCENTAGES EXCEEDING 4%, CROWN AND ROAD GRADE COMBINED REQUIRE SHIMMING. PLASTIC INJECTION MOLDED ADJUSTING RINGS ALLOWED WITH UP TO 1.2" DIFFERENTIAL ACROSS RING.

**STANDARD MANHOLE COVER**  
NTS

